

Analogue XLR Audio to Dante® Encoder

Description

The DA11XLR is a multi-input XLR to Dante® networked audio system. The DA11XLR converts 2 input channels of balanced / unbalanced / MIC audio with switchable 48V Phantom power to Dante® digital audio.


The DA11XLR is a plug & play device that is powered using PoE (Power over Ethernet), or via 12V power supply, offers support for AES67 RTP audio transport.









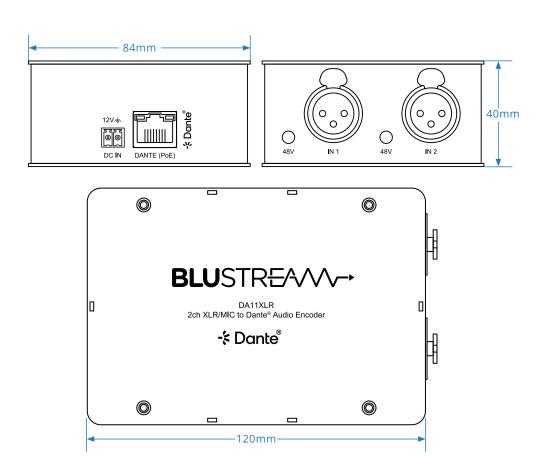

Key Features

- Dante® network interface for 2 x XLR audio inputs
- Converts 2 x balanced / unbalanced / MIC audio sources to Dante® audio channels
- Switchable 48V/0.5mA Phantom power for each MIC XLR input
- Adjustable MIC / line sensitivity from +24dBu to -28dBV for each
- Supports: 44.1, 48, 88.2 & 96 KHz sample rates @ 16, 24 & 32 Bit
- Configurable Dante® device latency (supports 2, 3, 4, 5 or 10ms configurable using Dante® Controller)
- Supports AES67 RTP audio transport
- Features Class 0 802.3af PoE for powering of product from any PoE switch
- Local 12V power supply input for when network switch does not support PoE*

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.



SDVoE











^{*} PS121PH power supply sold separately







Specifications

- Casing Dimensions (L x W x H): 120mm x 84mm x 40mm
- Shipping Weight: 0.3 Kg
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Storage Temperature: 4°F to 140°F (- 20°C to 60°C)
- Power Supply: Class 0 IEEE 802.3af POE PD or 12V/1A DC 2-Pin Phoenix connector

Connectivity

- Audio Input Connectors: 2 x Analogue Balanced / Unbalanced 3-Pin XLR connector
- Audio Output Connector: 1 x RJ45, female (100 Mbps Dante® network)

Included Accessories

1 x DA11XLR

1 x Quick Reference Guide

Acknowledgements

Dante® is a registered trademark of Audinate Pty Ltd.

Regulatory Compliance















CAN ICES-003(B) / NMB-003(B)

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.











