DA11XLRDE

BLUSTREAM

Dante® Audio to Analogue XLR Decoder

Description

The DA11XLRDE is designed to convert Dante® digital audio signals into 2-channel analogue audio via balanced or unbalanced XLR outputs. This plug-and-play device can be powered either through PoE (Power over Ethernet) from a compatible network switch or via a local 12V power supply input. Supporting AES67 RTP audio transport, the DA11XLRDE also features independent gain control for each channel, allowing precise adjustment of audio sensitivity as needed.

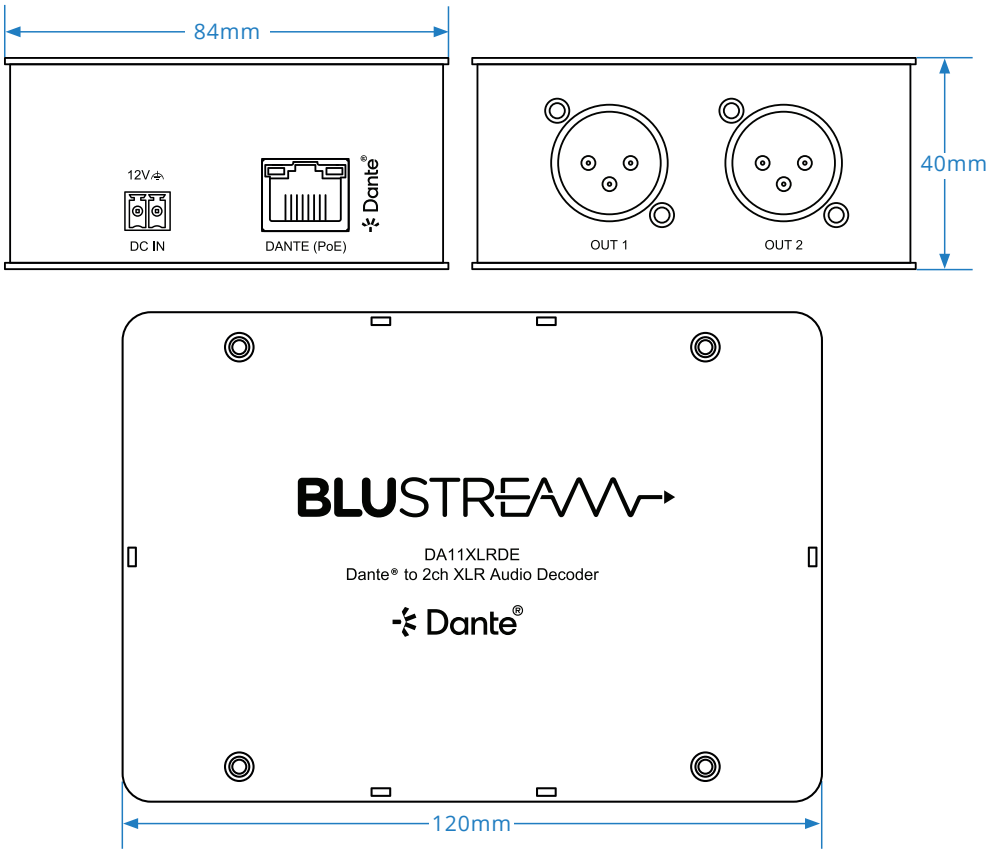

Key Features

- Dante® network interface for 2 x XLR audio outputs
- Decodes 2x Dante® digital channels to dual XLR balanced or unbalanced audio outputs
- Supports: 44.1, 48, & 96kHz sample rates @ 16, 24 and 32-bit
- Configurable Dante® device latency (supports 2, 3, 4, 5 or 10ms configurable using Dante® Controller)
- Independent output gain control per channel: -28dBV to +20dBu
- Supports AES67 RTP audio transport
- Features Class 0 802.3af PoE for powering of product from any PoE switch
- Local 12V power supply input for when network switch does not support PoE*

** PS121PH power supply sold separately*
Dante® is a registered trademark of Audinate Pty Ltd

Asia/Pacific Office - Blustream Pty Ltd, 24 Lionel Rd, Mt. Waverley, Victoria 3149, Australia - support@blustream.com.au | www.blustream.com.au
USA Office - Blustream USA, 1420 Perron Rd East, Suite 200, Mendota Heights, MN 55120 - support@blustream-us.com | www.blustream-us.com
UK Office - Blustream Ltd, The Service Station, Melton Road, Hickling Pastures, Nottinghamshire, LE14 3QG, UK - support@blustream.co.uk | www.blustream.co.uk
Europe Office - Blustream SL, Calle Oro 45, Nave 10, 28770, Colmenar Viejo, Madrid, Spain, EU - support@blustream.eu

DA11XLR

BLUSTREAM

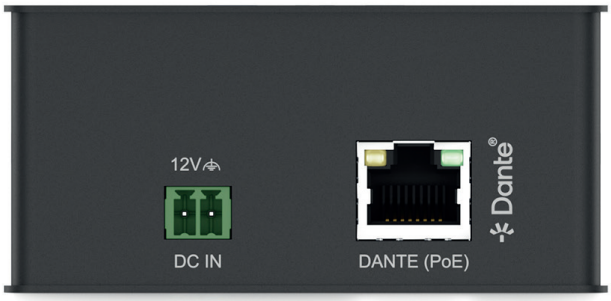

Specifications

- Casing Dimensions (W x H x D): 84mm x 40mm x 120mm
- Shipping Weight: 0.4 Kg
- Operating Temperature: 32°F to 104°F (0°C to 40°C)
- Storage Temperature: - 4°F to 140°F (- 20°C to 60°C)
- Power Supply: Class 0 IEEE 802.3af PoE, or 12V/1A DC 2-Pin Phoenix connector

Connectivity

- Audio Input Connectors: 1 x PoE Dante® Ethernet Connection (RJ45)
- Audio Output Connector: 2 x Analogue Balanced / Unbalanced 3-Pin XLR connector

Included Accessories

1 x DA11XLRDE

1 x Quick Reference Card

Acknowledgements

Regulatory Compliance

RoHS Compliant

CAN ICES-003(B) / NMB-003(B)

Asia/Pacific Office - Blustream Pty Ltd, 24 Lionel Rd, Mt. Waverley, Victoria 3149, Australia - support@blustream.com.au | www.blustream.com.au
USA Office - Blustream USA, 1420 Perron Rd East, Suite 200, Mendota Heights, MN 55120 - support@blustream-us.com | www.blustream-us.com
UK Office - Blustream Ltd, The Service Station, Melton Road, Hickling Pastures, Nottinghamshire, LE14 3QG, UK - support@blustream.co.uk | www.blustream.co.uk
Europe Office - Blustream SL, Calle Oro 45, Nave 10, 28770, Colmenar Viejo, Madrid, Spain, EU - support@blustream.eu