

## Line / MIC 2+2 XLR Dante® Audio Wall Plate EU


### Description

The DA22XLR-WP is a multi-input / output wall plate to convert analogue audio within a digital Dante® networked audio system.

The DA22XLR-WP features 2 input channels of balanced / unbalanced / MIC audio with switchable 48v phantom power and 2 output channels of balanced / unbalanced audio.

The DA22XLR-WP is a plug & play device that is powered using PoE (Power over Ethernet), or via 12V power supply, offers support for AES67 RTP audio transport and magnetic faceplate design allows for both UK & EU backbox compatibility.

The DA22XLR-WP is the ideal BYOD interface to a Dante® audio system.

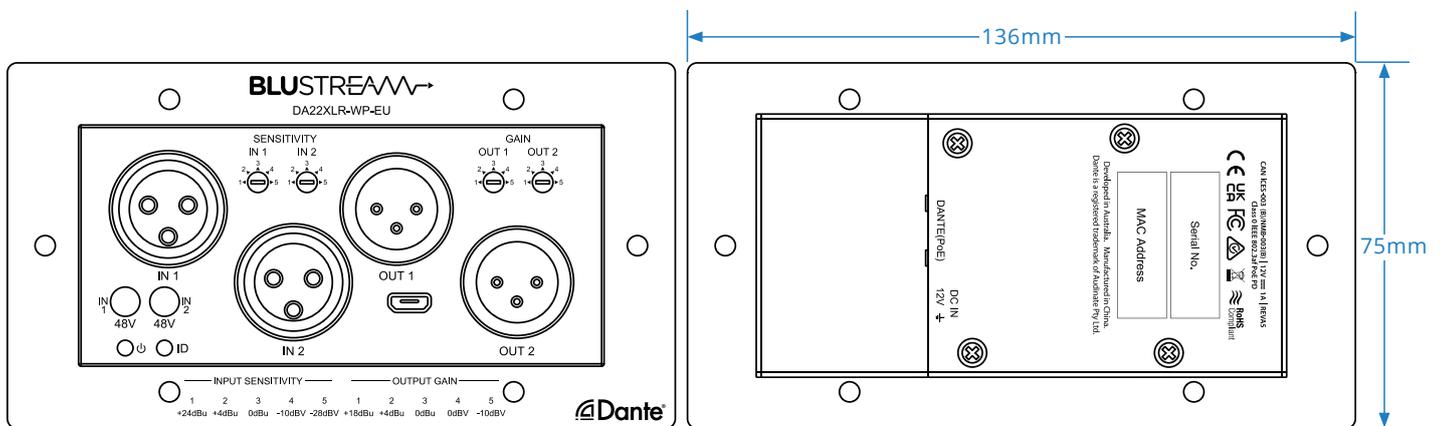

### Key Features

- Dante® network wall plate interface for 2 x audio inputs and 2 x audio outputs
- Converts 2 x balanced / unbalanced / MIC audio sources to Dante® audio channels
- Converts 2 x Dante® audio channels to balanced / unbalanced audio outputs
- Switchable 48V/0.5mA Phantom power for each MIC XLR input
- Adjustable MIC / line sensitivity from +24dBu to -10dBV for each XLR input
- Adjustable line gain from +18 dBu to -10 dBV for each XLR output
- Supports: 44.1, 48 & 96kHz sample rates @ 24 Bit
- Configurable Dante® device latency (supports 1, 2 or 5ms configurable using Dante® Controller)
- Supports AES67 RTP audio transport
- Features Class 3 IEEE 802.3af PoE for powering of product from any PoE switch
- Supports power via 12V DC adapter (supplied) for when network switch does not support PoE
- Magnetic faceplate surround allowing for both UK & EU backbox compatibility

\*Dante® is a registered trademark of Audinate Pty Ltd

Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.



## Specifications

- **Module Dimensions (L x W x H):** 136mm x 76mm x 45mm (without faceplate)
- **Faceplate Dimensions (L x W x H):** 146mm x 86mm x 5mm
- **Cut Out Dimensions (L x W x H):** 109mm x 50mm x 36mm
- **Mounting hole spacing:** UK 121mm CTC, EU 60mm CTC
- **Backbox Requirements:** UK double gang backbox / EU double gang backbox
- **Shipping Weight:** 0.6kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature:** -4°F to 140°F (-20°C to 60°C)
- **Power Supply:** Class 1 IEEE 802.3af PoE or 12V/1A DC 2-Pin Phoenix connector

## Included Accessories

<b>Faceplate</b>	1 x Magnetic Faceplate
------------------	------------------------

## Connectivity

- **Audio Input Connectors:** 2 x Analogue balanced / unbalanced 3-Pin XLR connector
- **Audio Output Connectors:** 2 x Analogue balanced / unbalanced 3-Pin XLR connector
- **Network Connectors:** 1 x PoE Dante® Ethernet connection (RJ45)
- **Configuration Switches:** 4 x 5 position rotary dials (Sensitivity / Gain), 2 x Push button (48V Phantom power)
- **Firmware Upgrade:** 1 x Micro-USB

## Acknowledgements

Dante® is a registered trademark of Audinate Pty Ltd.

## Regulatory Compliance



Blustream cannot be held responsible for errors in typography or photography. Specifications are subject to change without notice.