


# TTG-1EU

## Quick Reference Guide

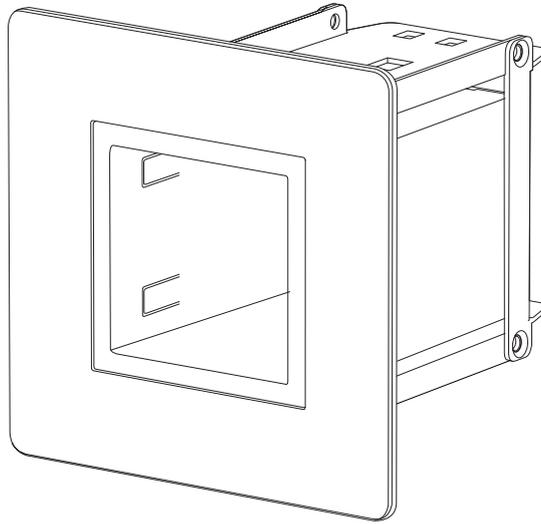

## Introduction

Our TTG-1EU is a single Euro module mounting grommet, designed to be mounted into a table top.

The module housing allows for any standard 50mm x 50mm, or 2x half width euro modules to be neatly secured into this brushed aluminium faceplate.

Alternatively, the unit is supplied with a universal cable management enclosure, allowing fixing for up to 3x AV, data or power cables to be routed or secured for easy access on a boardroom table or desk as required.

### FEATURES:

- Fits all standard (50mm x 50mm), and half width (25mm x 50mm) Euro modules
- Supplied with a cable management enclosure for securing of up to 3x cables inside the grommet
- Premium black brushed aluminum faceplate finish

## Specifications

**External Dimensions (W x H x D):** 90mm x 90mm x 92mm

**Cut Out Dimensions (W x H):** 73mm x 73mm

**Shipping Weight:** 0.45 Kg

**Operating Temperature:** 32°F to 131°F (0°C to 55°C)


**Storage Temperature:** - 13°F to 158°F (- 25°C to 70°C)

## Package Contents

- 1x TTG-1EU
- 1x Plastic insert for cable management
- 2x Cable management plates
- 2x Table top mounting brackets
- 2x Wing-nut bolts
- 1x Cut template
- 1x Quick Reference Guide



## Mounting the TTG-1EU

Use the supplied cut template to cut out the hole for the TTG-1EU to sit inside.

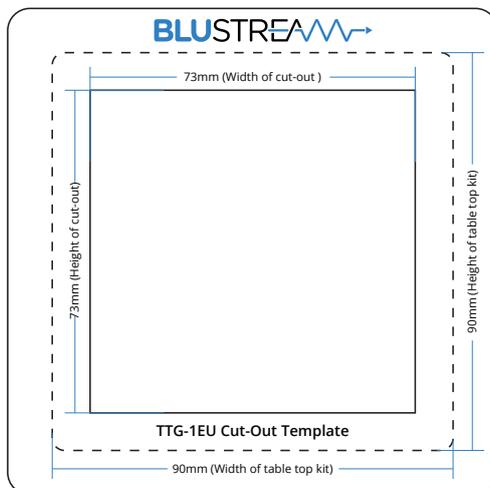

## Assembly of the TTG-1EU

- 1 Attach the side support brackets (labelled 'B') to the metal frame to give rigidity to the chassis if these have not already been attached, before installing into the mounting surface.
- 2 Slide the metal chassis of the TTG-1EU (labelled 'A') into the hole cut of the mounting surface or table.
- 3 Attach the triangular table top mounting brackets (labelled 'C') to the side of the metal chassis in either of the mounting slots (labelled 'D') .
- 4 Insert the wing nut bolts and feet as per the diagram below (labelled 'E') and tighten to clamp to the mounting surface, be careful not to overtighten the screws.
- 5 The assembled item should look like the diagram below on the right (labelled 'F')

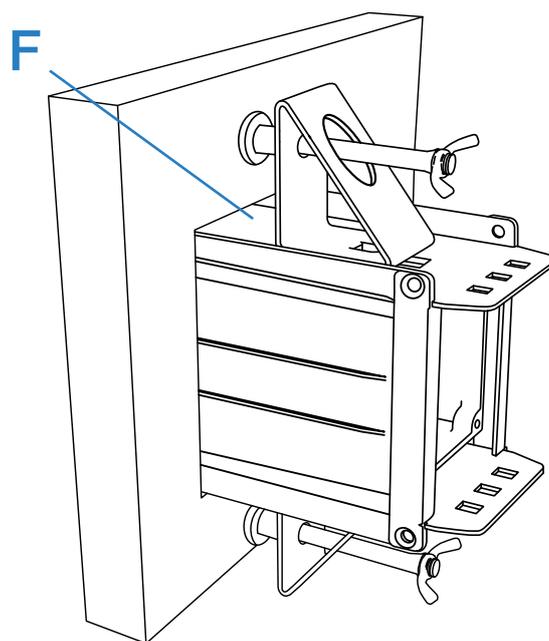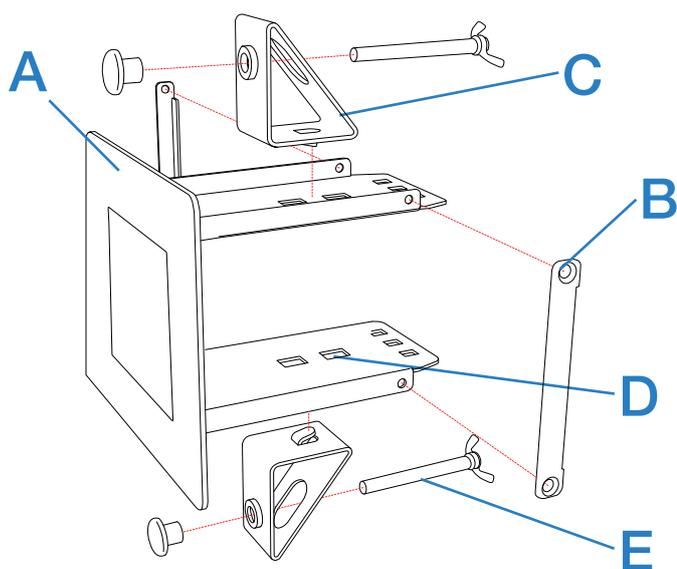


## Assembly of the TTG-1EU

Once the main unit has been secured to the surface it is being mounted to, the TTG-1EU has several options for inserts to be mounted into it as follows:

- 1 x single Euro module insert (not included)
- 2 x half Euro module inserts (not included)
- Cable management plate for securing up to 3x cables inside the grommet (included)

### Euro Module Mounting

Below is a diagram showing how a Euro module would be inserted into the TTG-1EU:

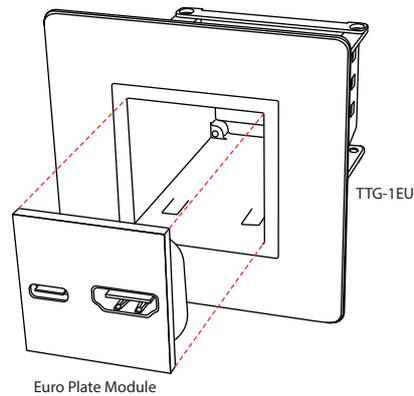

### Cable Management Plate

When using the TTG-1EU for passing cabling through the opening of a work surface or table top, slide the plastic insert for cable management (labelled 'G') into the top of the TTG-1EU.

The TTG-1EU is supplied with a bracket for securing up to 3x cables inside the grommet (labelled 'H'). Use the two plates together as per the below diagram to secure the cables inside the openings, ensuring you run your cables through the holes before securing them into the TTG-1EU.

